CyberPower®
Reliability. Quality. Value.

8-Outlet Surge Protector

HT0821TNCA0-AU

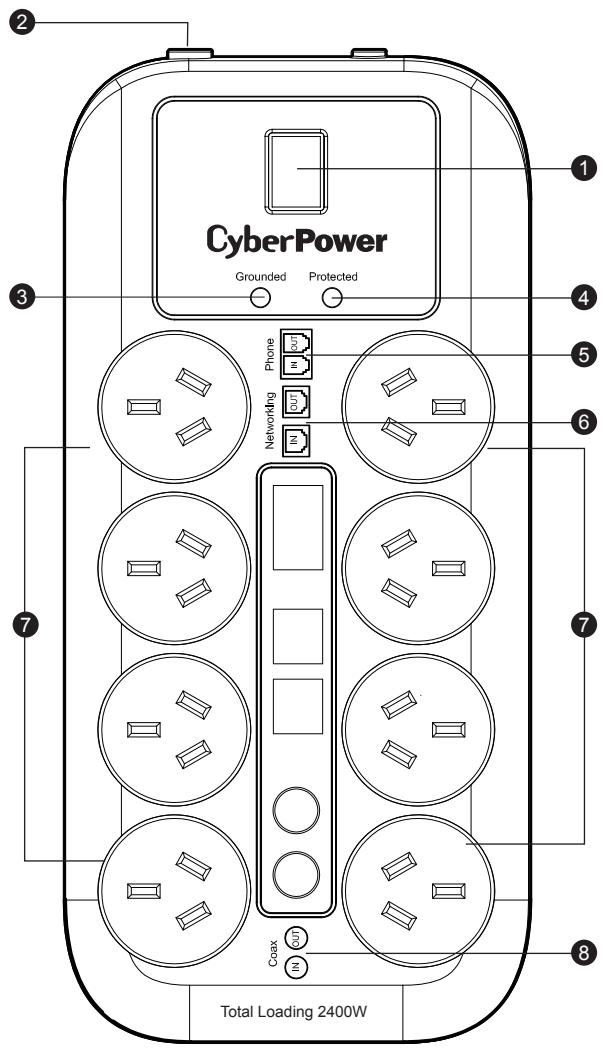

User Manual

CONGRATULATIONS ON YOUR PURCHASE

Thank you for selecting the CyberPower HT0821TNCA0-AU Surge Protector. The information contained in this brochure explains the features and operation of the HT0821TNCA0-AU. Please take a few moments to read this manual.

FEATURES

1. **ON/OFF Switch**
   Controls power to all outlets.
2. **Circuit Breaker Switch**
   To provide output overload and fault protection. It is a 10A breaker. When an overload occurs, it will shut-down automatically. To resume operation, ensure the overload condition is removed and reset the surge protector by switching the unit Reset.
3. **Grounded LED Indicator**
   Illuminated when a properly grounded AC outlet is detected.
4. **Protected LED Indicator**
   Illuminated when the surge protection feature is working properly.
5. **Phone/Fax/Modem Connections**
   To prevent surge damage to telephone equipment, connect the Phone/Fax/Modem through the surge protector.
   A. Connect the phone line from wall outlet into the “In” port.
   B. Connect the phones/fax/modems line(s) in the “Out” port.
6. **Network Connections**
   To prevent surge damage to Network equipment
7. **Standard Spaced Outlets(8)**
8. **Surge Protected Cable and Satellite Connections**
   Protects coaxial lines from surges and spikes.

SPECIFICATIONS

- **Part Number:** CPSURGE08-ANZ
- **Model Number:** HT0821TNCA0-AU
- **Outlets:** 8 Standard Spaced Outlets
- **Electrical Rating:** 240V/10A/50Hz/2400W
- **Surge Protection:** 2750 Joules
  L-N: 1550 Joules, L-E: 600 Joules, N-E: 600 Joules
- **Maximum Spike Current:** 67,500A
- **3 AC Lines Protected:** L-N: 37,500A, L-E: 15,000A, N-E: 15,000A; (The maximum surge possible on household wiring is 6,000 volts)
- **Maximum Spike Voltage:** 6000V
- **Response Time:** Less than 1 nanosecond
- **Telecommunications Protection:**
  RJ11 1 in / 1 out
  RJ45 1 in / 1 out
  Cable (coaxial) 1 pair
- **Circuit Breaker:** Resettable 10 Amp
- **EMI/RFI Filtration:** 150 kHz to 100 MHz
- **Attenuation:** up to 32dB

CAUTION

TO REDUCE THE RISK OF ELECTRIC SHOCK - Use only in dry locations and only indoors. **DO NOT** plug into another re-locatable power strip. **DO NOT** “daisy chain” surge protectors. **DO NOT** replace the supply cord. If the cord is damaged the equipment should be scrapped. **DO NOT** use with any aquarium equipment. DO NOT use if properly grounded outlets are not available. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but will maintain power to the load – now unprotected.

TROUBLESHOOTING

If the load of surge protector is over 10 Amp, the Circuit Breaker Switch may have tripped. Please examine your connected equipment and remove the device that is overloading the circuit. Then, push the **Button of Circuit Breaker Switch,** reset the circuit breaker.

If the **Grounded** indicator does not light when you plug in the surge protector, move the surge protector to a different grounded three-prong AC outlet. If it still does not light, return the product to the dealer for assistance. If the surge protector proves to be working properly, your outlets may not be properly grounded and need to be repaired by a professional electrician.

If the **Grounded** indicator turns off after a period of use, the surge protection has been depleted. Replace your surge protector.

If the **Protected** indicator does not light, the surge protector’s AC line is no longer protected from surges. Replace the surge protector. The surge protector may have received a power surge or spike beyond its specified limits that might overload the protection circuitry and make it inactive. The surge protector absorbed enough of the surge to protect your connected equipment, but it will not protect against future surges and spikes.

WARRANTY
LIMITED WARRANTY AND CONNECTED EQUIPMENT GUARANTEE

Read the following terms and conditions carefully before using the CyberPower HT0821TNCA0-AU (the “CPS Product”). By using the CPS Product, you consent to be bound by the terms and conditions of this Limited Warranty and Connected Equipment Guarantee (together referred to as this “Warranty”).
IF YOU DO NOT AGREE TO THE TERMS AND CONDITIONS OF THIS WARRANTY, YOU SHOULD RETURN THE PRODUCT FOR A FULL REFUND PRIOR TO USING IT

Who is providing this Warranty, what does it cover?
CyberPower Systems , Inc. (“CyberPower”) provides this Limited Warranty. It only covers the original purchaser and ends if you no longer own the CPS Product. This warranty covers defects in materials and workmanship in the CPS Product under normal use and conditions. It also covers equipment connected to the CPS Product and damaged because of the failure of the CPS Product. This warranty covers the CPS Product and connected equipment for as long as you own the CPS Product.

What must I do to make a warranty claim?
1. Contact CyperPower, mail address is service@cpsww.com.au.
2. Identify the Product, the Purchase Date, and the item(s) of Connected Equipment.
3. Provide a dated Proof-of-Purchase receipt (or other proof of the original purchase) and provide a description of the defect.
4. Pack and ship the product to CyberPower and, if requested, the item(s) of Connected Equipment, and all claim forms that CyberPower provides to you. Show the Claim Number on the shipping label or include it with the product. **You must prepay all shipping costs, you are responsible for packaging and shipment, and you must pay the cost of the repair estimate.**
5. Do each of these within ten days of the occurrence.

What will CyberPower do to correct problems?
CyberPower will inspect and examine the CPS Product. If the CPS Product is defective in material or workmanship, CyberPower will repair or replace it at CyberPower’s expense, or CyberPower will refund the full purchase price you paid for the CPS Product (purchase receipt showing price paid is required).

If the CPS Product failed to protect any equipment plugged into it, we will also send you forms for making your claim for the connected equipment. We will repair or replace the equipment that was damaged because of the failure of the CPS Product or pay you the **fair market value (NOT REPLACEMENT COST)** of the equipment at of the time of the damage. We will use another third-party valuation guide or other sources to establish that amount. Our maximum liability is limited to $50,000 for the HT0821TNCA0-AU.

Who pays for shipping?
We pay when we send items to you; you pay when you send items to us.

What are some things this Warranty does not cover?
1. THIS WARRANTY DOES NOT COVER ANY SOFTWARE THAT WAS DAMAGED OR NEEDS TO BE REPLACED DUE TO THE FAILURE OF THE CPS PRODUCT OR ANY DATA THAT IS LOST AS A RESULT OF THE FAILURE OR THE RESTORATION OF DATA OR RECORDS, OR THE REINSTALLATION OF SOFTWARE.
2. This Warranty does not cover: misuse, modification, operation or storage outside environmental limits of the CPS Product or the equipment connected to it, or for damage while in transit or in storage, nor if there has been improper operation or maintenance, or use with items not designed or intended for use with the CPS Product, such as laser printers, appliances, aquariums, medical or life support devices, etc.

What are the other limitations?
The sole and exclusive remedies of the Initial Customer are those provided by this Warranty.
1. This Warranty does not apply unless the CPS Product and the connected equipment were connected to properly wired and grounded outlets (including compliance with electrical and safety codes of the most current electrical code), without the use of any adapters or other connectors.
2. The CPS Product must have been plugged directly into the power source and the equipment connected to the CPS Product must be directly connected in the CPS Product, not “daisy-chained” together in serial fashion with any extension cords, another Product or device similar to the CPS Product, surge suppressor, or power tap. Any such installation voids the Warranty.
3. The CPS Product and connected equipment must have been used properly in a suitable and proper environment, in conformance with any applicable license, instruction manual, or warnings.
4. The CPS Product must have been used at all times within the limitations on the CPS Product’s VA capacity.

Please join CyberPower in caring for the environment by recycling this manual.

This devise is manufactured using environmentally-safe procedures in compliance with the Restriction on Hazardous Substances (RoHS) directive.

CyberPower Australia
E-mail: sales@cpsww.com.au
Website: www.cpsww.com.au

© 2013 CyberPower Systems, Inc.
All rights reserved. All other trademarks are the property of their respective owners.

K09-0000187-00